

# Sewing One o' One e-classes

(Free Project # 2)



## Cute cell phone case

## Supplies

### Tools and equipment

### Must have

#### Must have

- Sewing machine
- Scissors
- Ruler
- Iron and ironing board
- Chalk/wax or soap
- Dressmaker pins
- Safety pin

- 12" or 30 cm lightweight polyester batting – usually used in quilting
- All purpose polyester thread
- Universal needle, size 80/12
- Jeans/Denim 90/60 if sewing denim
- 20" or 50 cm drawstring or ribbon

### Project description

Tired of boring black cell phone cases? Try making this simple pouch that will work for your cell phone, Ipod, blackberry or anything you want. For colours and texture – sky is the limit.

#### Optional

### Optional

- Beads
- Toggle
- Sewing machine instruction manuals.

### Fabric

Length-12' or 30 cm

Width -any

- Cotton
- Polyester
- Bridal satin
- Jeans/Denim

**Important!** We are not responsible for your wrong measurements or cutting. See Terms and Conditions of Use on our website.


# Sewing One o' One e-classes

## Step 1




Have your fabric, batting, cell phone, Ipad or blackberry ready.

## Step 4

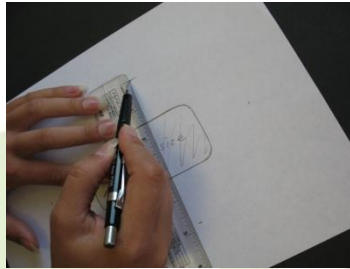

Add the (width of the device x 2) on all sides.

## Step 7

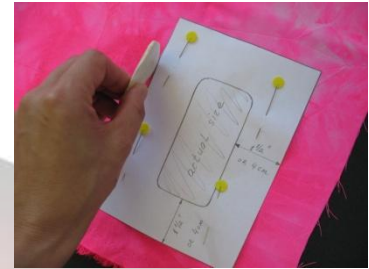


Pin your pattern to the fabric, mark and cut. You will need 4 pieces.

## Step 2



Trace your device.

## Step 5

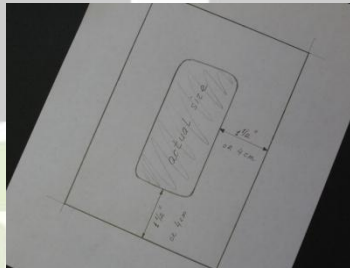


In our case, the width of our cell phone is  $\frac{3}{4}$ " or about 2cm. So  $(\frac{3}{4} \times 2) = 1 \frac{1}{2}$ " or  $(2\text{cm} \times 2) = 4\text{cm}$ .

## Step 8




Press.

## Step 3

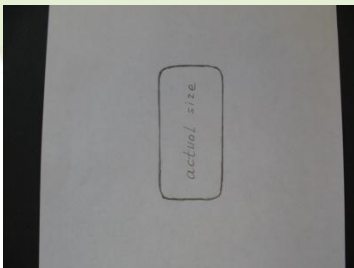


That will be an actual size.

## Step 6

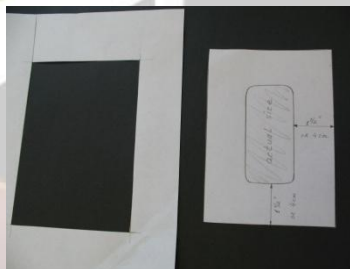

Cut the finished size, not the actual.


## Step 9

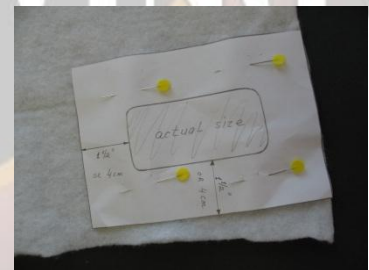

Pin your pattern to the batting.

# Sewing One o' One e-classes

## Step 10

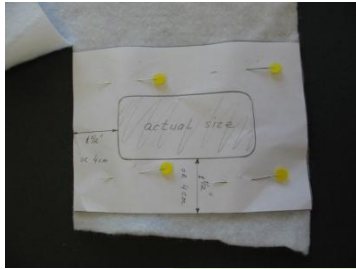


Mark and cut. You will need 2 pieces.

## Step 13



Wind your bobbin.

## Step 16

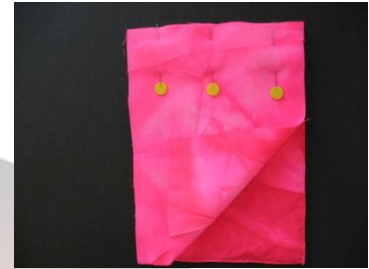

Join the third piece to already sewn fabric and batting right sides together. Pin. Sew at the top only.

## Step 11



Join batting and wrong side of the fabric together. Use dressmaker pins to hold. You should have two joined pieces.

## Step 14




Set pressure dial to # 2.

## Step 17



Join the fourth piece to the other already sewn fabric and batting with right sides together. Pin. Sew at the top only.

## Step 12

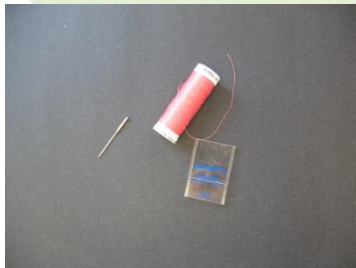

Have your proper needle and thread ready.

## Step 15



Sew fabric and batting together on both pieces.


## Step 18



Open each joined piece and press.

# Sewing One o' One e-classes

## Step 19

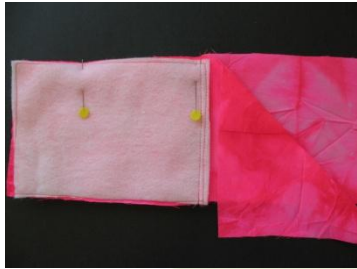


Now, you should have two pieces.

## Step 20




Join them. Pin. Batting side out.

## Step 21

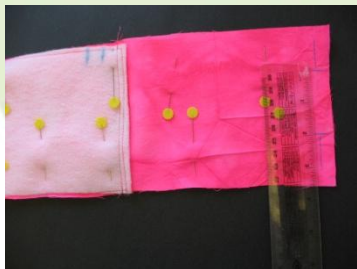

Mark two holes; one is for the string on the side – is  $\frac{1}{2}$ " (1  $\frac{1}{2}$  cm) and second – to access; at the bottom – 2"(5cm)

## Step 22

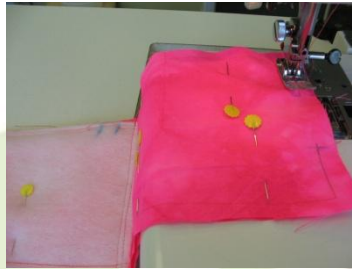

Sew all the way around except the marked spots. Always backstitch for security.

## Step 23



Turn right side out using access opening you've left not sewn. Sew the opening shut by hand. Press.


## Step 24



Side without batting is going to act as lining. Fold it in. Now, it should look like a case. Find the hole for the

string, mark stitching line.

## Step 25

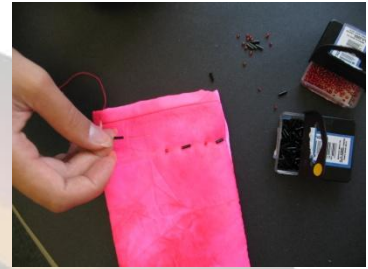

Sew casing for a string by hand. We used beads for decoration(optional).

## Step 26



Use safety pin to pull the string through.

## Step 27(optional)



Use toggle to tighten or loosen the drawstring or ribbon. If you don't have a toggle, just tie the ends.